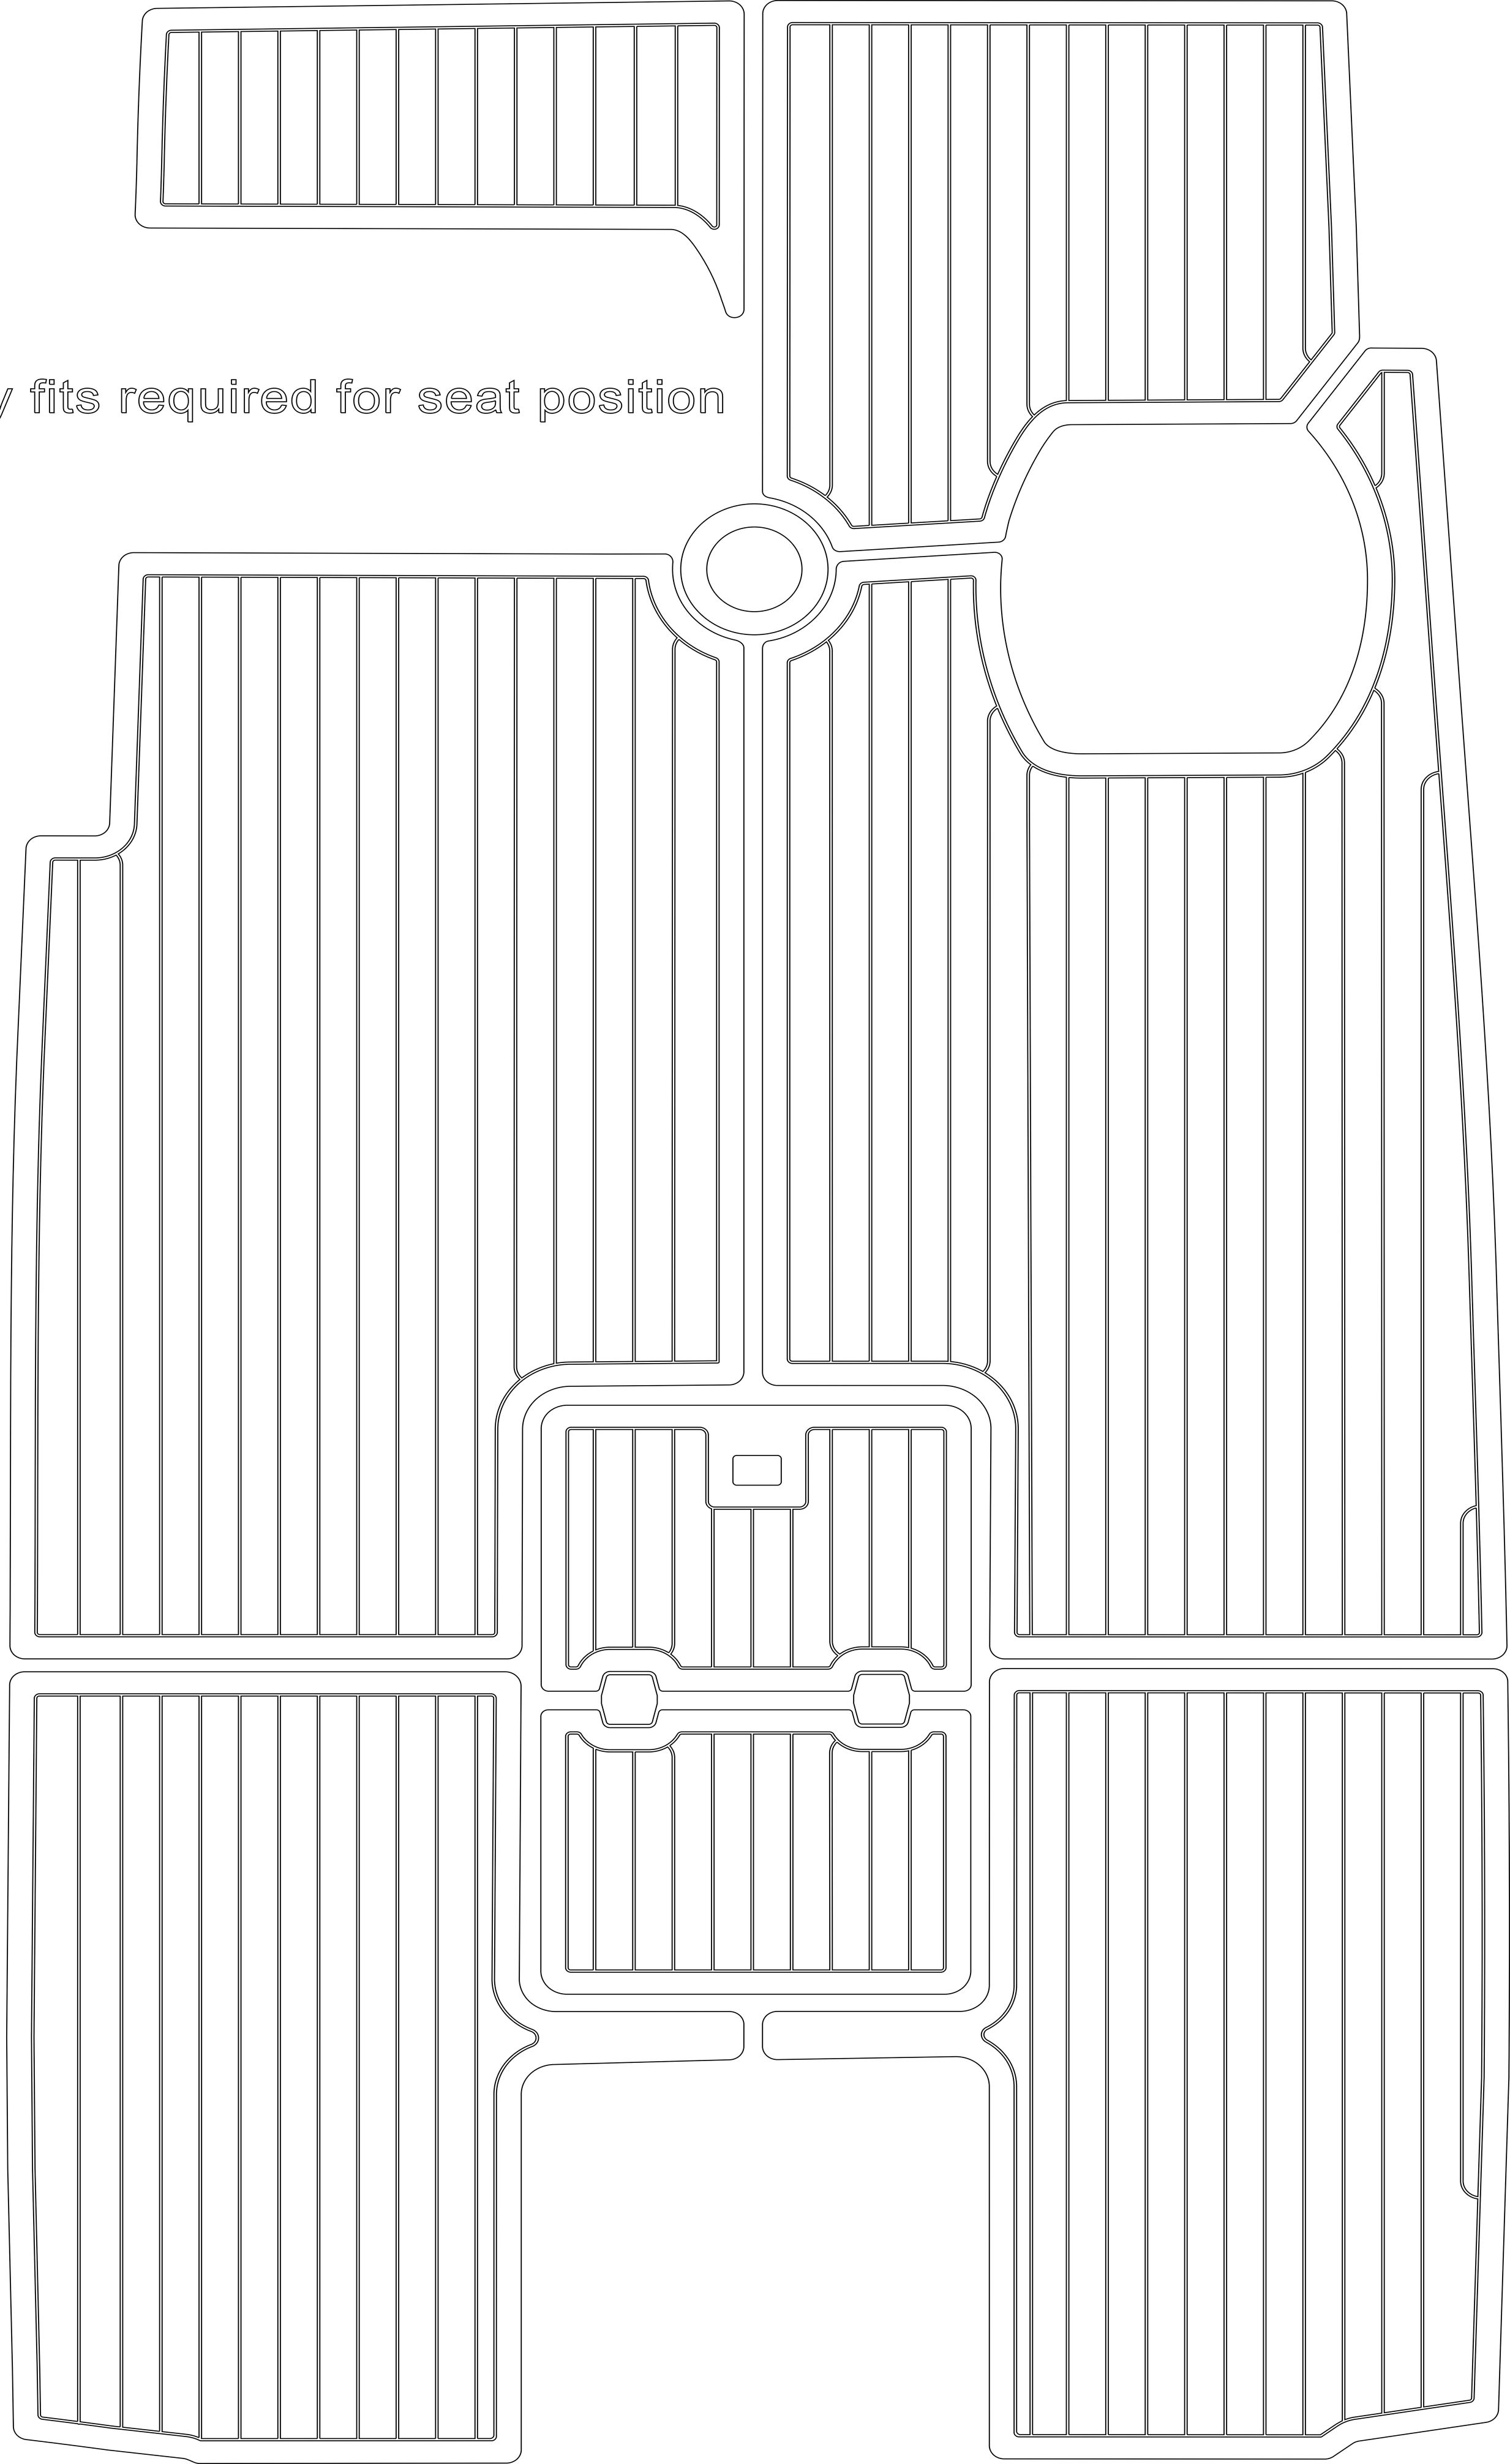Dry fits required for seat position